## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

## (19) World Intellectual Property Organization International Bureau



## - I TORRE COLUMN DE REPORT DE COME DE

(43) International Publication Date 22 January 2004 (22.01.2004)

PCT

## (10) International Publication Number WO 2004/007323 A1

(51) International Patent Classification<sup>7</sup>: A01K 61/00

B65G 53/30,

(21) International Application Number:

PCT/DK2003/000478

(22) International Filing Date:

8 July 2003 (08.07.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: PA 2002 01094


12 July 2002 (12.07.2002) DK

- (71) Applicant (for all designated States except US): KM FISH MACHINERY [DK/DK]; Falkevej 15-17, DK-9352 Dybvad (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): CHRISTENSEN, Kaj [DK/DK]; E. Billesvej 87, DK-9300 Sæby (DK).

- (74) Agent: LARSEN & BIRKEHOLM A/S; Skandinavisk Patentbureau, Banegardspladsen 1, P.O.Box 362, DK-1570 Copenhagen (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: A METHOD OF EMPTYING A CONTAINER, AND USE OF THE METHOD

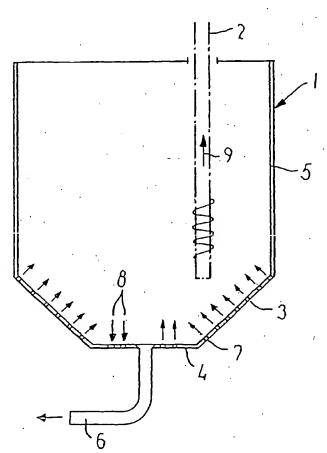

(57) Abstract: A-method of emptying a large container of e.g. 12000 litres for the storage of fish, such as shellfish, e.g. shrimps, said container being emptied through a pipe in the container, air being supplied simultaneously with the emptying. The air is expediently supplied through/near the bottom of the container via holes which are provided in a pattern, or via a pipe distribution system which is lowered into the container. By supplying the air to the container during emptying it is ensured that the pipe, through which the fish are discharged from the container, does not clog, and that the contents are discharged as a uniformly distributed mass.